


snapControl




Länge mit Befestigungslaschen: 173 mm ± 1mm

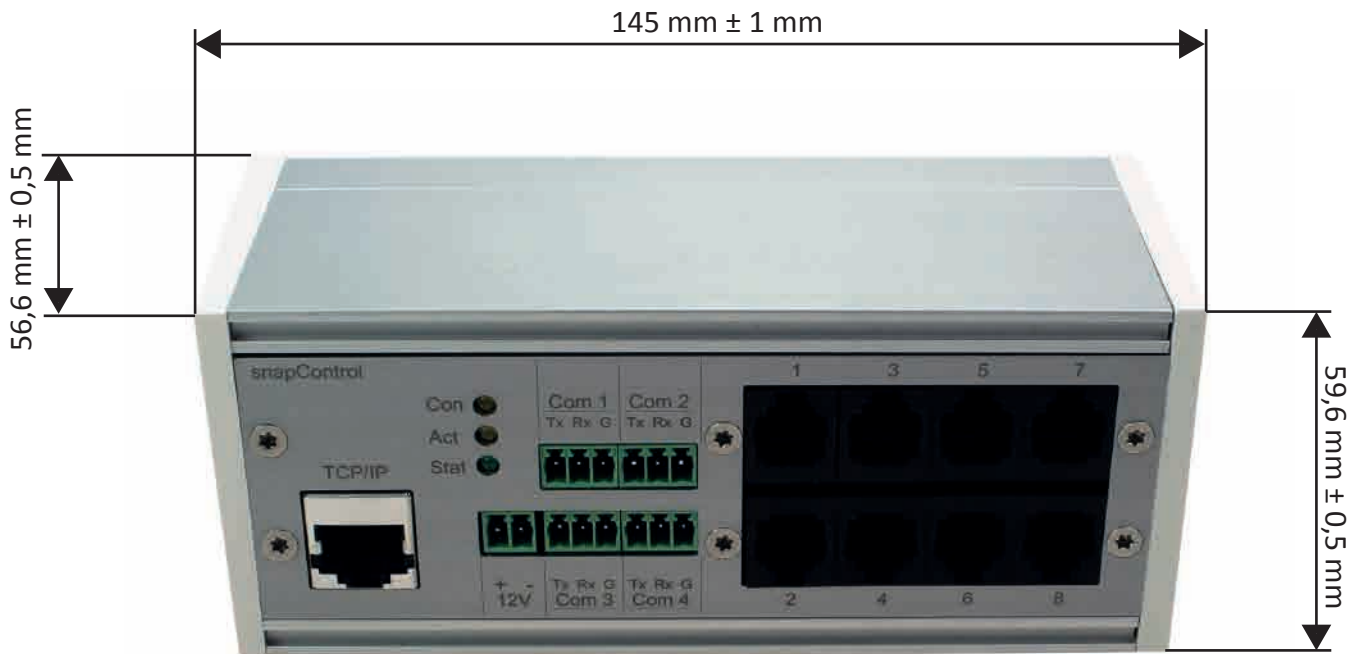

Im Packet enthalten:


- snapControl
- Netzteil + Länderadapter
- Befestigungslaschen
- 4x Anschlussklemmen
RM 3,5 für seriell ports
- Pin assignment
- Bedienungsanleitung

Snapcontrol pin assignment

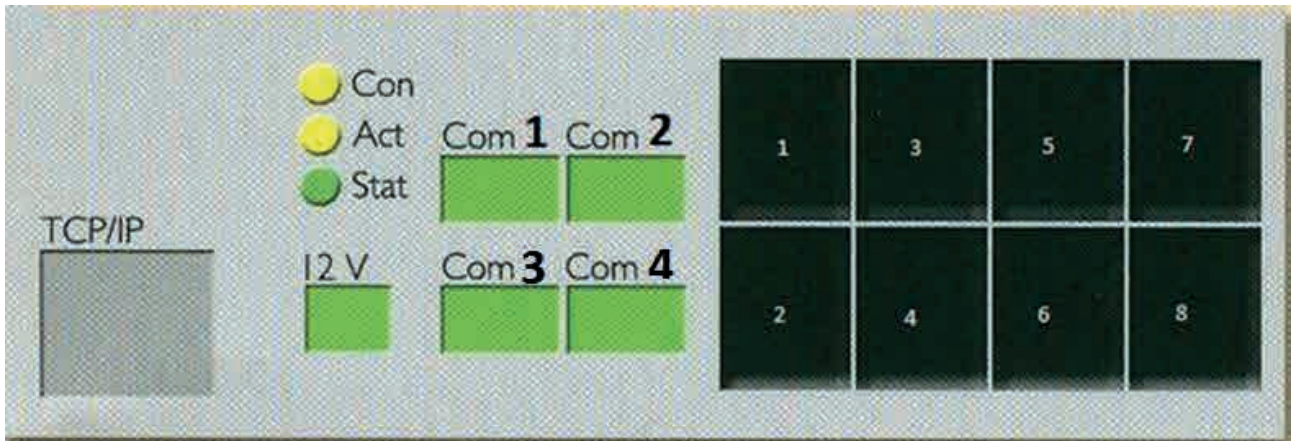


Reihe 1: RJ 12: 1 3 5 7
 Reihe 2: RJ 12: 2 4 6 8

TCP/IP:

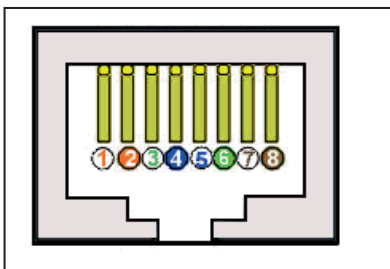


Pin	Name	Beschreibung
1	TX+	Trancieve Data+ (Weiß-Orange)
2	TX-	Trancieve Data- (Orange)
3	RX+	Recieve Data+ (Weiß-Grün)
4	n/c	Nicht verwendet (Blau)
5	n/c	Nicht verwendet (Weiß-Blau)
6	RX-	Recieve Data- (Grün)
7	n/c	Nicht verwendet (Weiß-Braun)
8	n/c	Nicht verwendet (Braun)

Com 1 – 4:

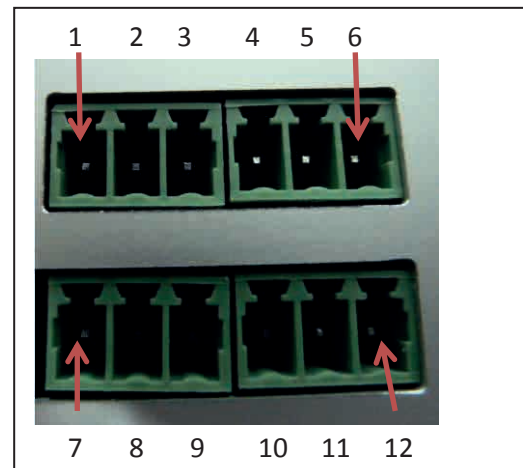

PIN 1 = COM 1/Tx PIN 2 = COM 1/Rx PIN 3 = COM 1/GND
 PIN 4 = COM 2/Tx PIN 5 = COM 2/Rx PIN 6 = COM 2/GND
 PIN 7 = COM 3/Tx PIN 8 = COM 3/Rx PIN 9 = COM 3/GND
 PIN 10 = COM 4/Tx PIN 11 = COM 4/Rx PIN 12 = COM 4/GND

12 V Power:




PIN 1 = +12V
 PIN 2 = GND

PIN RJ 12:



1 = GND
 2 = Button
 3 = GND
 4 = LED

Overview:

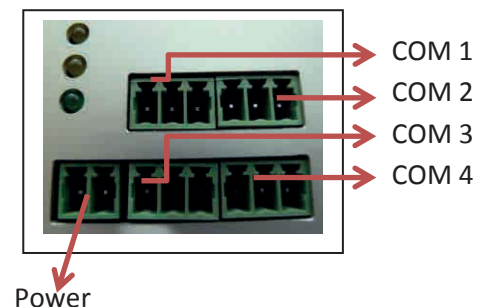

Power

Switching adapter 24W with 4 changeable AC plugs

- CEC efficiency regulation compliance
- Wide input voltage range
- Very compact size and easy AC plug change
- International approvals

Technical data:

Input:	
Input voltage:	90-260VAC
Frequency:	47-63 Hz
Input current max:	0.6A/230VAC
Inrush current max:	50A
Output:	
Output voltage:	12V
Output current:	2A
Isolation class:	II
Line regulation 90-264V:	<2%
Load regulation 0-100% last:	<5%
Ripple&noise:	120mV
Efficiency:	>87%
Hold up time:	20mS at 230VAC
Temperature range:	0°C...+40°C
Plug and cable:	1.8m cable 18AWG. All kind of DC p
Size:	82.5x48.5x35 mm without AC plug
Weight adapter:	225g without AC plug
Weight AC plugs:	EU 11g, UK 26g, China, AU 11g, US
Safety and EMC:	UL60950, EN60950. CE, FCC Part 15
	EN60065, UL6500



lugs are available.

15g
Class B

Dimensions:

