


Mini RGB chip LED

■ KPGF-0606 Series

Features

- 0.65mm X 0.65mm SMD LED, 0.2mm thickness.
- Common anode.
- Can Produce any color in visible spectrum.
- Moisture sensitivity level: level 3.
- Low current IF=5mA operating.
- RoHS compliant.
- Small footprint.

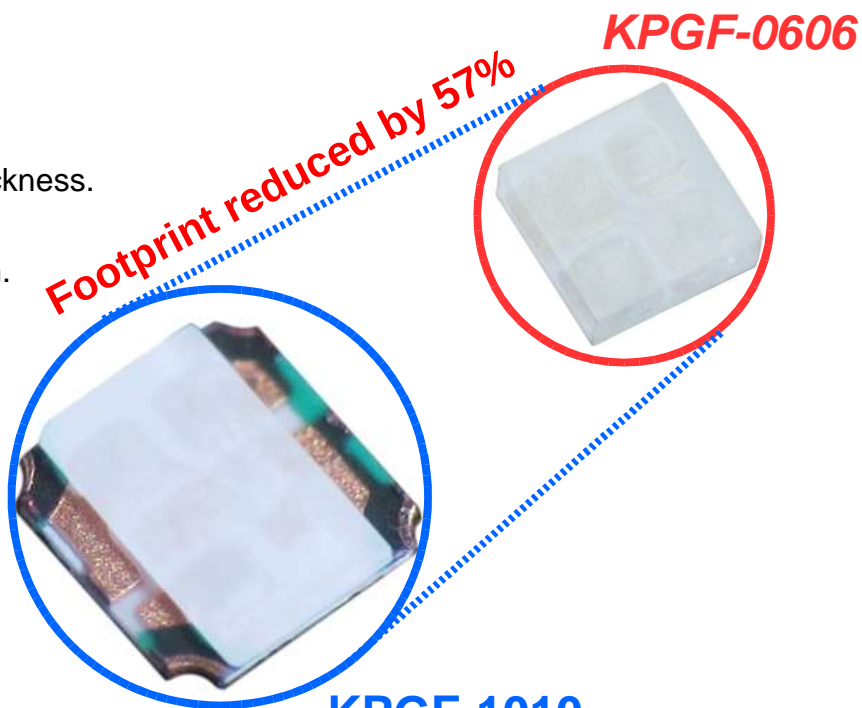

Descriptions

- Can be used in back lighting. Indicator, office automation, home appliances, wearable technology.
- Available in 8 mm tape on 7" diameter reels, 4000pcs/reel.

Part Number	Material	λD (nm)	Lens Type	Iv (mcd) @ =5mA		Viewing Angle 2 θ 1/2
				Min.	Typ.	
	AlGaInP	● 624		10	30	130°
KPGF-0606GBRC-120	InGaN	● 467	Water Clear	5	20	140°
	InGaN	● 527		30	90	145°



Please refer to datasheets for detailed specification; For internal use only.